



W A Y P R O

Gas-driven lubricator



AUTOMATIC LUBRICATION

Advantages



Reliable

Gas production (N_2) through electronically controlled chemical reaction, reliable despite changing ambient temperatures



Economical

Lower lubrication costs, lower lubricant consumption, longer machine service life



Eco-friendly

Eco-friendly product, easy disposal



Flexible

3 sizes, setting can be changed anytime, self-filling possible, no tools required for activating



Further advantages


- Certificated



IP68



Technical data

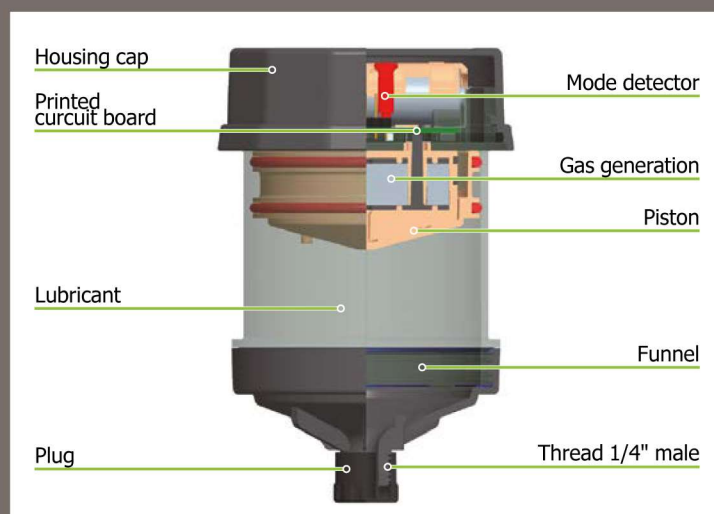

Drive

Gas driven (N_2)

Operating pressure

Max. 5 bar (73 psi)

Lubricant volume

60 ml / 120 ml / 240 ml

Operating temperature

-20 °C to +55 °C

Lubricating medium

Oils and greases up to NLGI 2

Distribution period

1, 3, 6, 9 & 12 months

Operational voltage

3 V (battery)

Filling

empty / standard filling / special filling

Dimensions (height x Ø)

60 ml: 91 x 77 mm

120 ml: 111 x 77 mm

240 ml: 156 x 77 mm

Certifications

IP68, CE, ATEX

Applications



EC Way Pro is applicable in nearly all branches and areas. Activating does not require any tools. For an indirect installation we recommend our wide range of accessories.

PT. Megah Wijaya Teknik

www.megahwijayateknik.com