

Gruetznert G-LUBE OIL

Electromechanical oil lubricator



Advantages



Refillable on-site

easy refilling process
saves time and money



Temperature-independent

linear discharge during
the complete period



Multipoint lubrication

connection of distributors
possible



Countdown of remaining running time


remaining running time in days can
be read on the display at any time



Further advantages

- extra-large oil reservoir of 500 ml
- numerous detailed status messages via display and LED
- up to 2 years dispensing time adjustable

Technical data

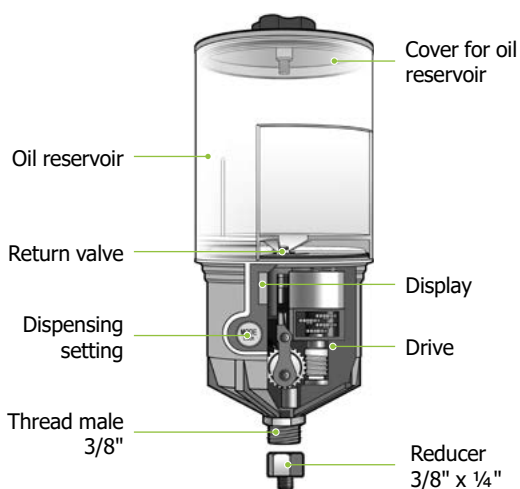

Drive

electromechanical

Operating pressure

max. 10 bar (145 psi)

Distribution period

0.5/1/2/4/6/12/18/24 months

Lubricant volume

500 ml

Operating temperature

Al battery: +5 °C to +60 °C

Li battery: -15 °C to +60 °C

Working voltage

4.5 V (Al or Li battery)

Lubricating medium

oils > ISO VG 10

Filling

empty

Dimensions (height x Ø)

229 x 99 mm

Multipoint lubrication

up to 10 lubrication points

Protection class

IP54

Areas of application



As a battery-operated oil lubrication system, G-LUBE OIL is self-sufficient and therefore particularly flexible. With up to 10 bar delivery pressure, lubrication is possible over longer distances.



GRUETZNER
AUTOMATIC LUBRICATION

Gruetzner GmbH
Dagobertstr. 15 • 90431 Nuremberg, Germany
tel. +49 911 277 399 0
info@G-LUBE.com • www.G-LUBE.com