

WAY PRO

Precise electromechanical single-point lubrication



AUTOMATIC LUBRICATION

Advantages



Easy handling

No tools required



Status reports

Optical function and fault indication by LEDs



Outdoor use

Temperature-independent flow rate



24 V adapter

retrofitable, no follow-up costs



Further advantages

- High reliability
- 3 sizes available



Technical data

Battery

Dispensing setting

Drive

Pressure plate


Lubricant cartridge

Piston

Lubricant

Outlet 1/2"

Reducer 1/4"

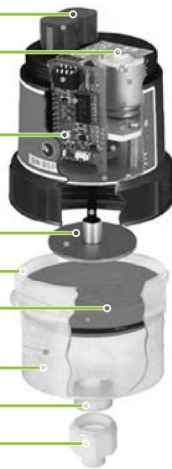

Drive

electromechanical

Operating pressure

max. 7.5 bar (109 psi)

Distribution period

1-12 months

Lubricant volume

60 ml / 150 ml / 250 ml

Operating temperature

-20 °C to +60 °C

Working voltage

6.0 V (Li battery) or 24 V (adapter)

Lubricating medium

oils and greases up to NLGI 2

Filling

empty/standard filling/special filling

Dimensions (height x Ø)

60 ml: 138 x 84 mm

150 ml: 151 x 84 mm

250 ml: 183 x 96 mm

Performance monitoring

green/red LED

Areas of application



Its precise delivery system makes Way Pro equally suitable for the automatic lubrication of roller and friction bearings, gear racks, open transmissions or chains.